



Double Tension Compression Hardware With Line Side Rod Type Arcing


Home » Compression Hardware » Double Tension Compression hardware with line side rod type arcing

Double Tension Compression Hardware With Line Side Rod Type Arcing

Download Product details

Other Product Quick Link

- Single Tension Compression +
- Double Tension Compression +

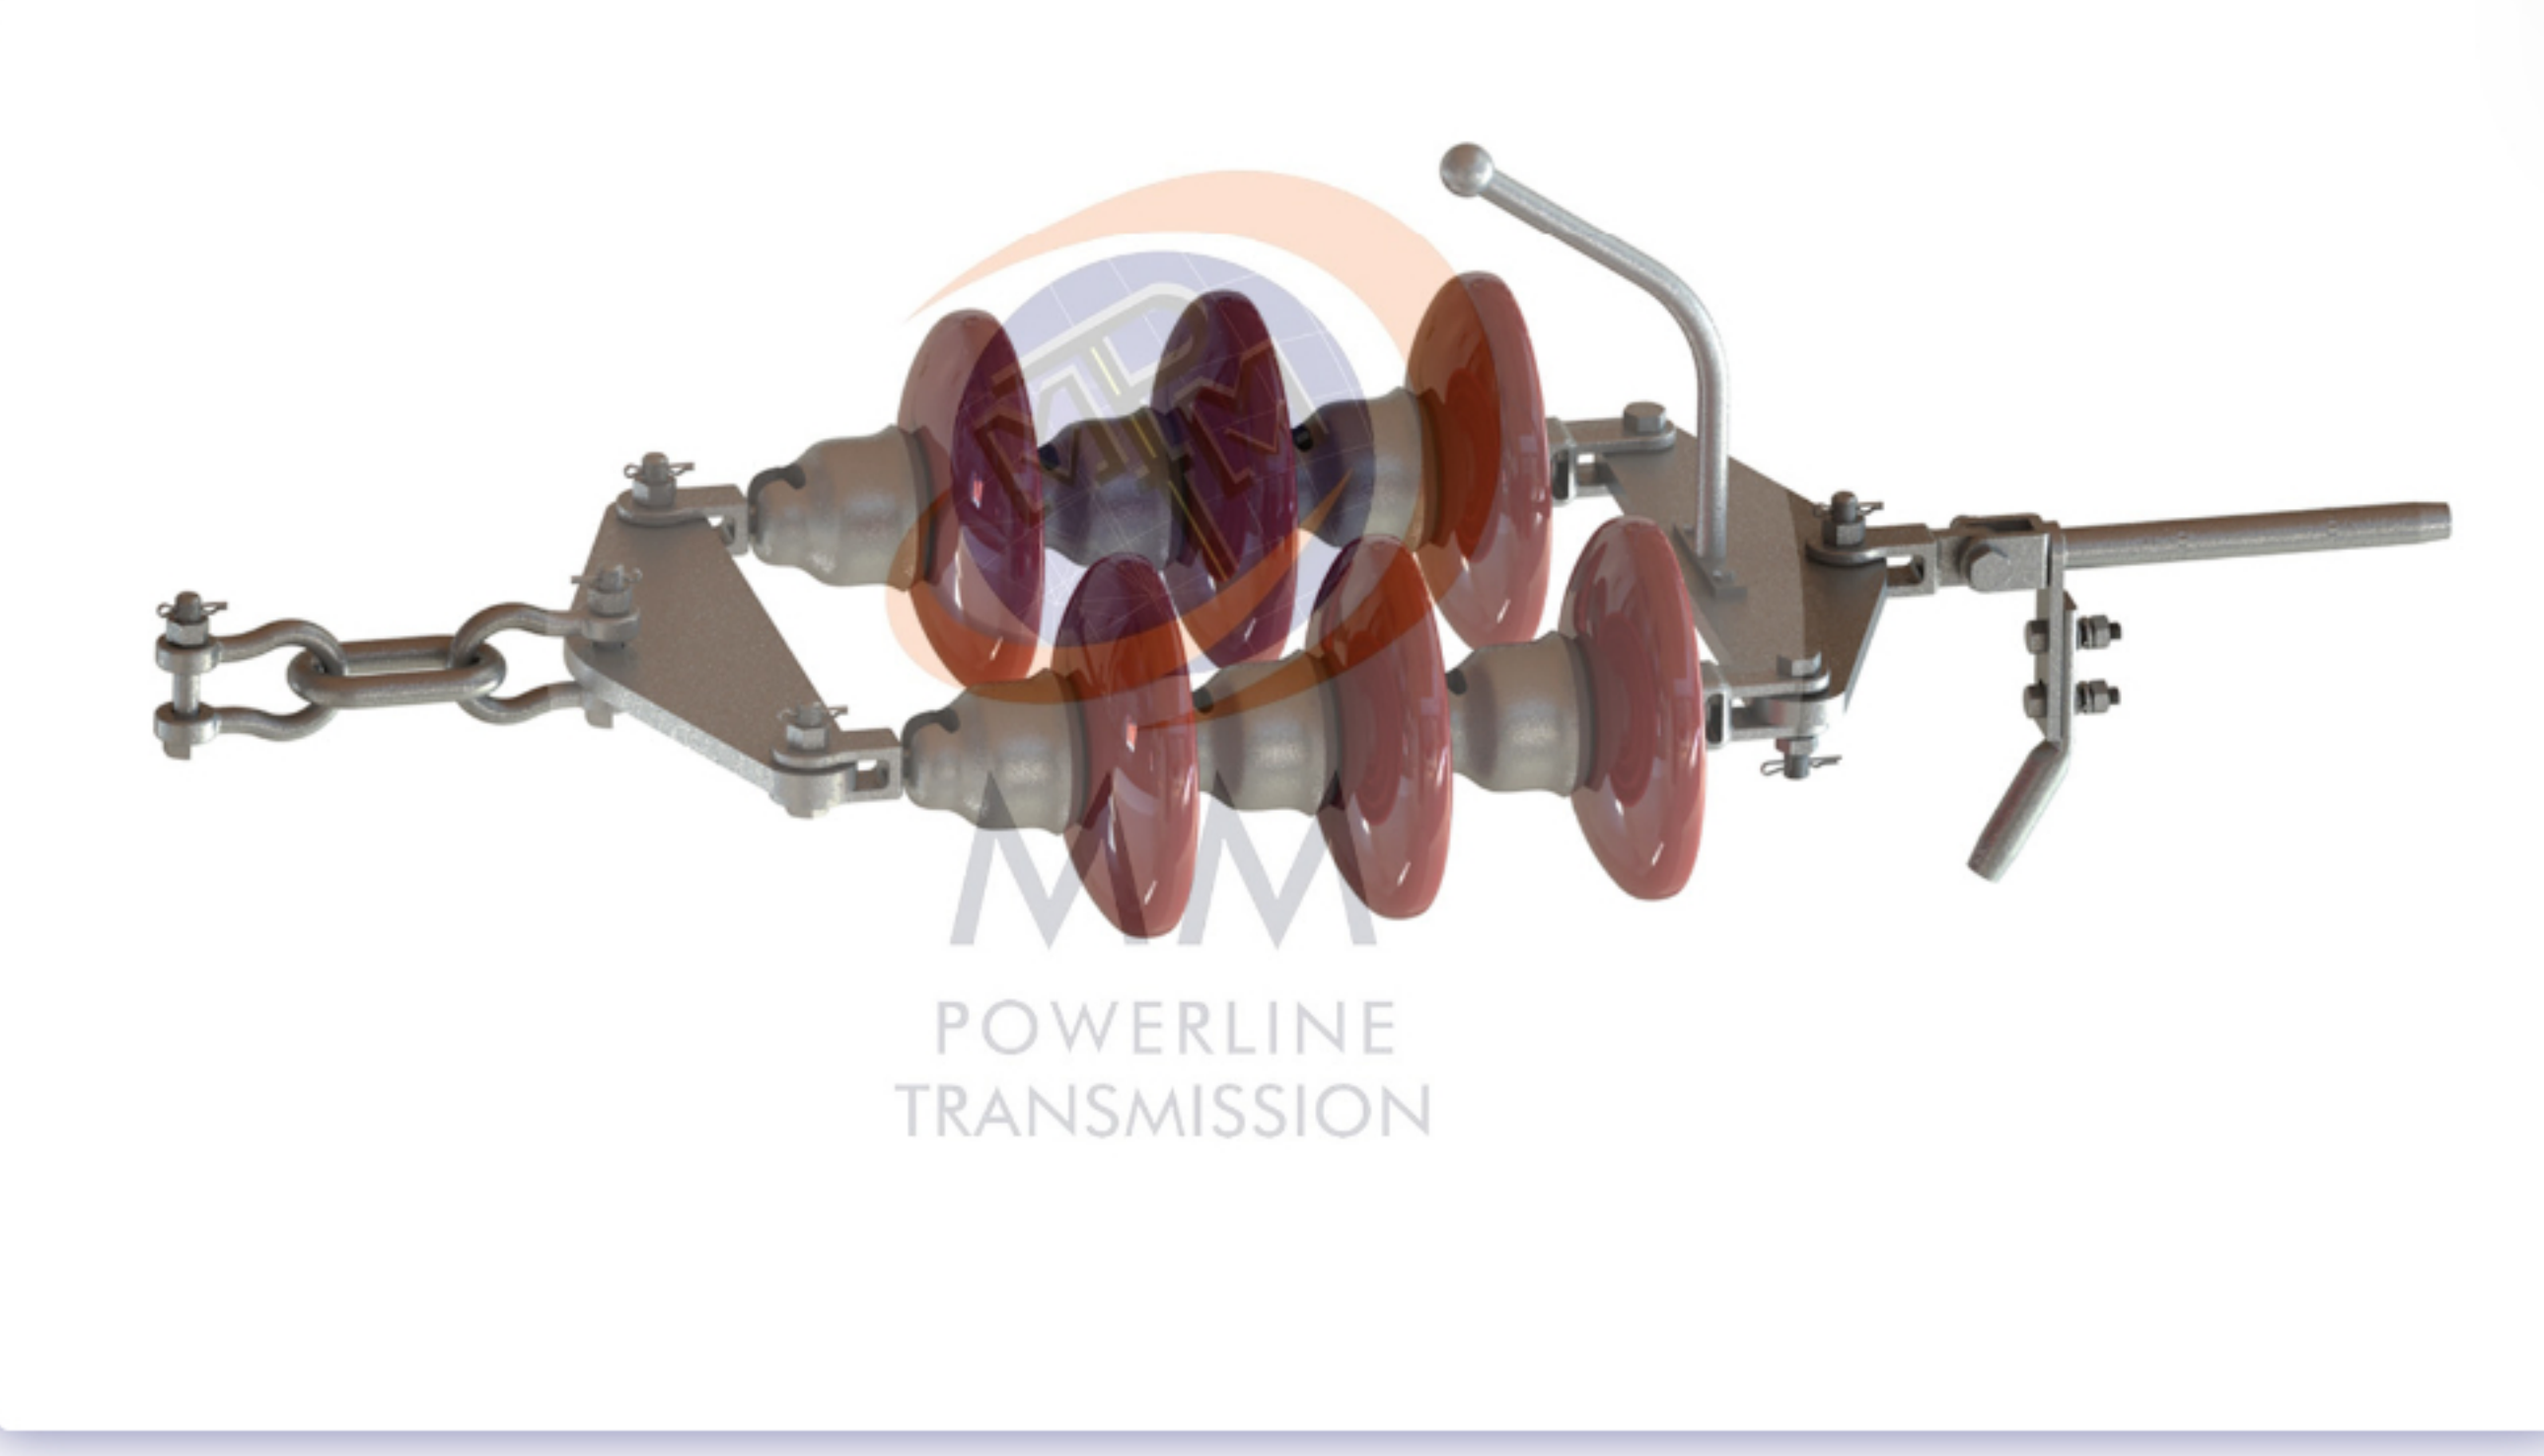


MM Powerline Transmission is one of the leading manufacturer and supplier of Double Tension Compression Hardware. Arcing horns (Rod Type) are projecting conductors used to protect insulators or switch hardware on high voltage electric power transmission systems from damage during lightning strikes and other overvoltage phenomena.

Arcing horns provide a path for flashover to occur that bypasses the surface of the protected device. Horns are normally paired on either side of an insulator, one connected to the high voltage part and the other to ground, or at the breaking point of a switch contact. Double Tension Compression Hardware can be used for Overhead Lines and Substations and can achieve the highest breaking load, using Compression connection techniques.

Compression Hardware ensures proper connection/fitting. It helps in reducing power loss, hence increasing the electrical conductivity. These are rust free, having longer life than Bolted type, and are light in weight. In case of any fault/damage, only the damaged portion is required to change.

Double Tension Hardware Fittings are installed where double strings of insulators are being used. Double Tension Compression Hardware are easy to install.

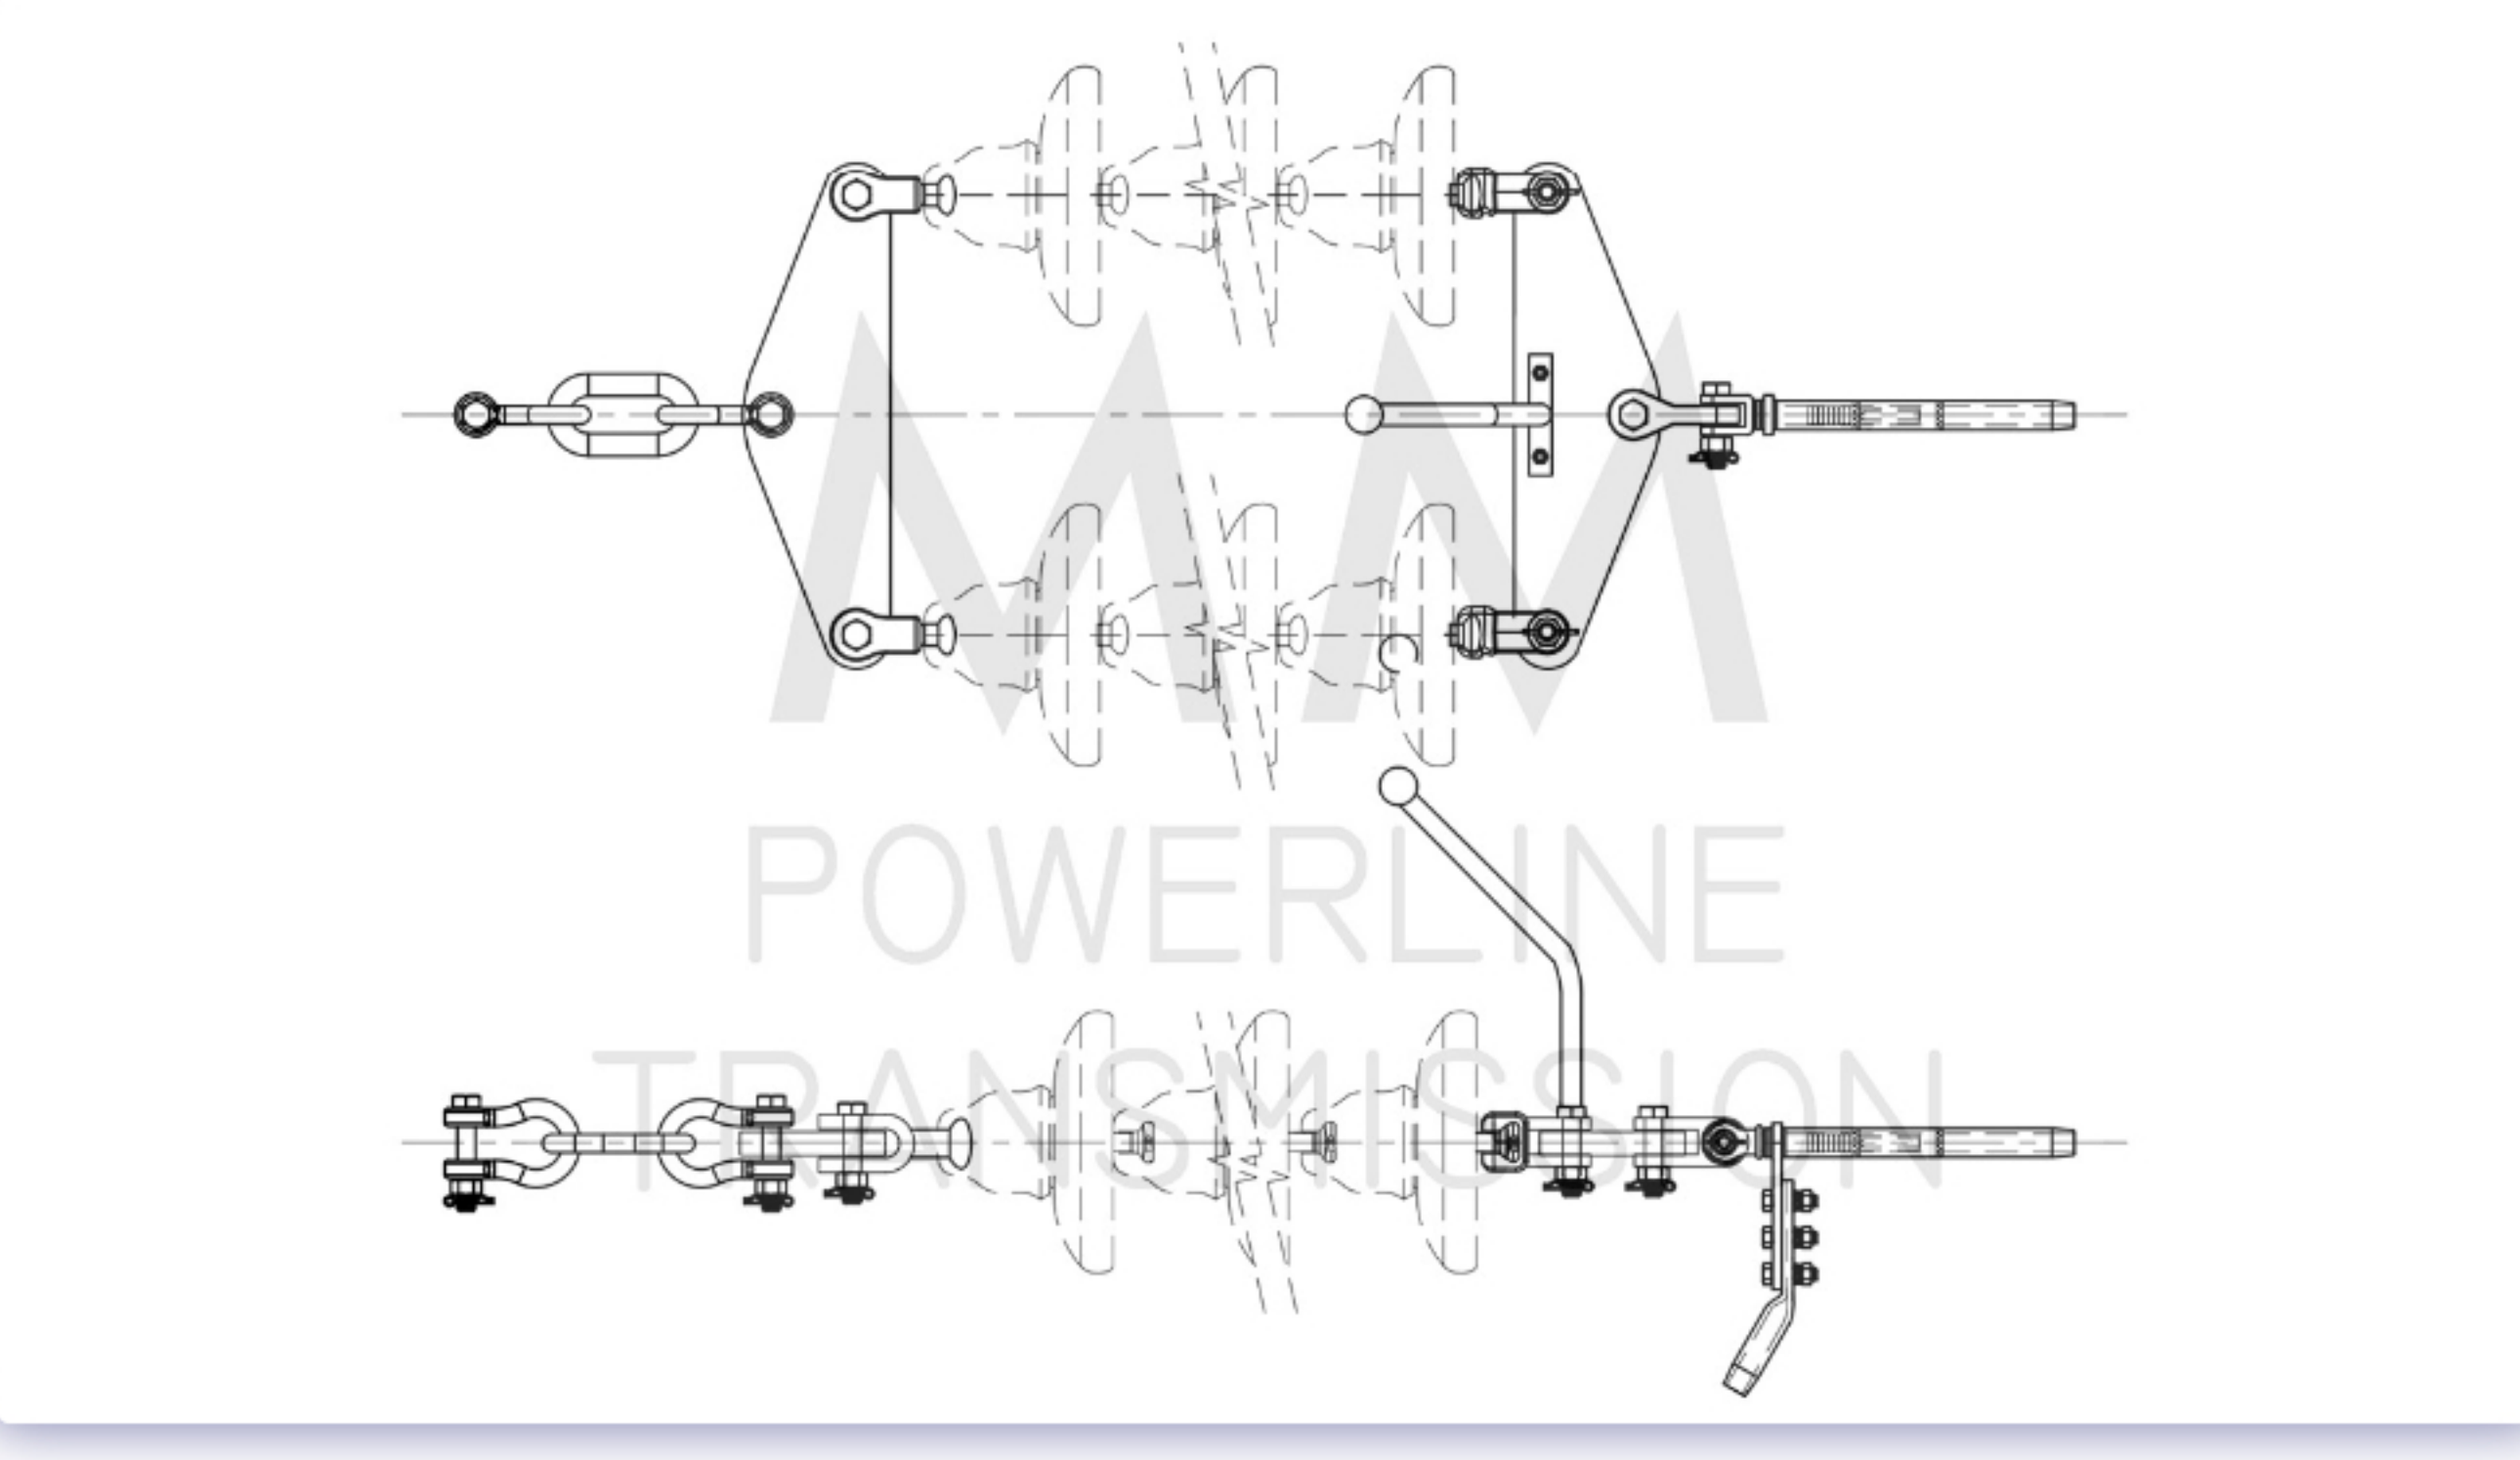

BOM

SL. NO	DESCRIPTION	MATERIAL	SURFACE TREATMENT	QTY./SET
1	U-SHACKLE	F.S. (CL-IV)	H.D.G.	2
2	CHAIN LINK.	F.S. (CL-IV)	H.D.G.	1
3	YOKE PLATE (T.S.)	MILD STEEL	H.D.G.	1
4	BALL CLEVIS	F.S. (CL-IV)	H.D.G.	2
5	ARCING HORN (L.S.)	MILD STEEL	H.D.G.	1
6	ARCING HORN (T.S.)	MILD STEEL	H.D.G.	1
7	SOCKET CLEVIS	F.S. (CL-IV)	H.D.G.	2
8	YOKE PLATE (L.S.)	MILD STEEL	H.D.G.	1
9	CLEVIS EYE	F.S. (CL-IV)	H.D.G.	1
10	TENSION CLAMP	EXTRUDED AL. (99.5% PURITY & F.S.)	AL & H.D.G.	1

TECHNICAL DATA

1. U.T.S. OF HARDWARE FITTING (WITHOUT TENSION CLAMP: 120 KN.x2
2. SLIP/MECHANICAL STRENGTH OF TENSION CLAMP : 95% OF UTS OF THE CONDUCTOR
3. BALL & SOCKET DESIGNATION : 16MM. AS PER I.S.: 2486, PART-II.
4. SPECN. TO WHICH H/W FITTING CONFORM – I.S.: 2486, PART-I.
5. ALL FERROUS PARTS (EXCEPT SPRING WASHER) SHALL BE HOT DIP GALVANISED CONFORMING TO IS : 2633 AND SPRING WASHER ELECTRO GALVANISED .
6. GENERAL TOLERANCE: ±3% UNLESS OTHERWISE SPECIFIED.

AVAILABLE FOR THE FOLLOWING CONDUCTORS

For ACSR

SL. NO	ACSR CODE	CONDUCTOR DIA.
1	RACCOON	12.27
2	DOG	14.15
3	LEOPARD	15.84
4	COYOTE	15.86
5	TIGER	16.52
6	WOLF	18.13
7	ORIOLE	18.82
8	LYNX	19.53
9	LARK	20.47
10	PANTHER	21.00
11	LION	22.26
12	BEAR	23.45
13	GROSBKAK	25.16
14	TEAL	25.24
15	GOAT	25.97
16	ANTELOPE	26.73
17	KUNDAH	26.80
18	SHEEP	27.93
19	DRAKE	28.14
20	ZEBRA	28.62
21	DEER	29.89
22	CAMEL	30.15
23	ELK	31.50
24	MORKULLA	31.68
25	MOOSE	31.77
26	BERSIMIS	35.05

For AAAC

SL. NO	AAAC CODE	CONDUCTOR DIA.
1	RABBIT	9.30
2	DOG	12.78
3	PANTHER	19.70
4	PANTHER-UP	22.05
5	YEW	25.97
6	ZEBRA	28.00
7	ZEBRA-UP	29.79

Our Brands



Contact Us

- Facebook
- Twitter
- LinkedIn

Quick Links

- Home
- About Us
- Career
- Contact Us

Address

Office : 2D,N.S.Road,shantinagar Colony,Compact Appt., Block-B,Flat-G001,Liluah,Howrah-711 204,West Bengal,India

Factory : 58,N.S.Road,Liluah,Howrah – 711204,West Bengal,India

+91 8961536500 sales@mmpt.in

