


THIS DRAWING IS THE PROPERTY OF MM POWER LINE TRANSMISSION AND MUST NOT BE RE-PRODUCED OR REVEALED TO A THIRD PARTY WITHOUT WRITTEN PERMISSION




TECHNICAL DATA

1. ALL DIMENSIONS ARE IN MM.
2. STANDARD SPECIFICATION : EN 50397-2 & NFC 33-041
3. CLAMP SUITABLE FOR 100 SQ.MM. AAAC XLPE COVERED CONDUCTOR (11KV)
4. UTS OF HARDWARE : 70KN.
5. UTS OF TENSION CLAMP : 30 KN.
6. SLIP STRENGTH OF TENSION CLAMP : 5KN.
7. BALL & SOCKET DESIGNATION : 16MM & 16MM B.
8. FERROUS PART HOT DIP GALVANIZED AS PER IS: 2629/IS: 2633/IS: 4759.
9. GENERAL TOLERANCE : $\pm 5\%$

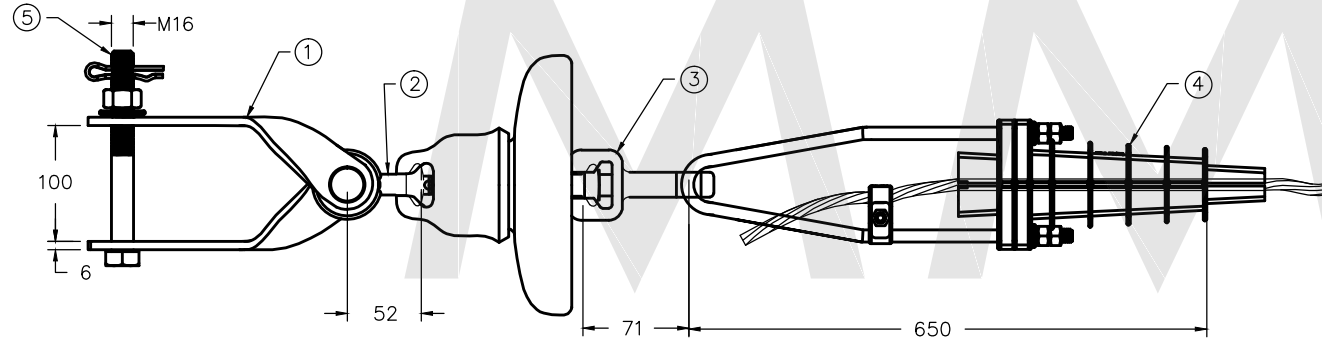

5	BOLT, NUT & WASHER	STEEL, HDG	1
4	TENSION CLAMP WITH ANTI TRACKING DEVICE	AL. ALLOY/HEAT & UV STABILIZED THERMOPLASTIC/MILD STEEL HDG	1
3	SOCKET EYE	STEEL, HDG	1
2	BALL EYE	STEEL, HDG	1
1	TWISTED STRAP	MILD STEEL, HDG	1
SR. NO.	DESCRIPTION	MATERIAL	QTY.

DRWN.	PS	18.05.23	 MANUFACTURER : MM POWER LINE TRANSMISSION 58,N.S.ROAD,LILUAH, HOWRAH-711204
CHKD	SM	18.05.23	
APPVD.	PM	18.05.23	
SCALE : NOT TO SCALE			TITLE- TENSION FITTING FOR COVERED CONDUCTOR
DRG. NO.-MMPT/TFCC/632			SHEET : 1/1
ALL DIMENSION ARE IN MM			QTY. :
PROJECTION : 			REV. :